

# Linear Measuring Technology

**Magnetic measurement system**

**Limes LI20 / B1**

**Resolution min. 10 µm**



The non-contact incremental magnetic linear measurement system LI20 / B1 - made up of the sensor head LI20 and of the magnetic band B1 - reaches a resolution up to 10 µm with a maximum distance of 1 mm between the sensor and the band.

**NEW:** Version for outdoor use with extremely sturdy aluminium housing and stainless-steel cover, wide temperature range as well as a UV-resistant cable. IP68 / IP69K protection, special encapsulation technology and tested resistance to cyclic humidity and damp heat offer the highest levels of reliability, even in exposed outdoor use.



Temperature



High protection level



Shock / vibration resistant



Reverse polarity protection

## Robust

- Sturdy housing with IP67 protection. Option: special housing for maximum resistance against condensation (IP68 / IP69K, resistance to cyclic humidity acc. to EN 60068-3-38 as well as damp heat acc. to EN 60068-3-78)
- Non-contact measuring system – free from wear
- Masking tape protecting the magnetic band

## Easy installation

- Simple glued assembly of the magnetic band
- Large mounting tolerances
- Requires very little installation space
- Warning signals via LED if the magnetic field is too weak

## Order code

**Magnetic sensor Limes LI20**

**8.LI20 . X1X1 . 2XXX**  
Type      a      b      c      d      e      f

**a Model**

- 1 = IP67, standard  
2 = IP68 / IP69K and humidity tested acc. to EN 60068-3-38, EN 60068-3-78

**b Pulse edge interval**

- 1 = standard

**c Output circuit / Power supply**

- 1 = RS422 / 4.8 ... 26 V DC  
2 = Push-Pull / 4.8 ... 30 V DC

**d Type of connection**

- 1 = cable PUR, 2 m length

**e Reference signal**

- 2 = index periodic

**f Code (resolution) <sup>1)</sup>**

- 005 = 100 µm  
020 = 25 µm  
050 = 10 µm

**Stock types:**

- 8.LI20.1111.2005  
8.LI20.1111.2020  
8.LI20.1111.2050  
8.LI20.1121.2005  
8.LI20.1121.2020  
8.LI20.1121.2050

## Order code

**Magnetic band Limes B1**

**8.B1 . 10 . 010 . XXXX**  
Type      a      b

**a Width**

- 10 = 10 mm

**b Length**

- 0010 = 1 m      0060 = 6 m  
0020 = 2 m      0100 = 10 m  
0040 = 4 m      0200 = 20 m  
0050 = 5 m      Other lengths up to 50 m on request

**Stock types:**

- 8.B1.10.010.0010  
8.B1.10.010.0020  
8.B1.10.010.0050  
8.B1.10.010.0100

<sup>1)</sup> With quadruple evaluation (only connected with magnetic band Limes B1)

# Linear Measuring Technology

<b>Magnetic measurement system</b>	<b>Limes LI20 / B1</b>	<b>Resolution min. 10 µm</b>
------------------------------------	------------------------	------------------------------


Accessories / Display Type 572		
<b>Position display, 6-digit</b>	with 4 fast switch outputs and serial interface	<b>6.572.0116.D05</b>
	with 4 fast switch outputs and serial interface and scalable analogue output	<b>6.572.0116.D95</b>
<b>Position display, 8-digit</b>	with 4 fast switch outputs and serial interface	<b>6.572.0118.D05</b>
	with 4 fast switch outputs and serial interface and scalable analogue output	<b>6.572.0118.D95</b>

Further accessories can be found in the Accessories section or in the Accessories area of our website at: [www.kuebler.com/accessories](http://www.kuebler.com/accessories).  
Additional connectors can be found in the Connection Technology section or in the Connection Technology area of our website at: [www.kuebler.com/connection\\_technology](http://www.kuebler.com/connection_technology).

Technical data – Magnetic sensor Limes LI20		
<b>Output circuit</b>	Push-Pull	RS422
<b>Supply voltage</b>	4.8 ... 30 V DC	4.8 ... 26 V DC
<b>Permissible load / channel</b>	±20 mA	120 Ω
<b>Max. cable length</b>	max. 30 m	RS422 Standard
<b>Power consumption (no load)</b>	typ. 25 mA, max. 60 mA	
<b>Short circuit proof <sup>1)</sup></b>	yes	yes <sup>2)</sup>
<b>Min. pulse edge interval</b>	1 µs (corresponds to 4 µs/cycle see signal figures below)	
<b>Output signal</b>	A, $\bar{A}$ , B, $\bar{B}$ , 0, $\bar{0}$	
<b>Reference signal</b>	index periodical	
<b>Accuracy</b>		
<b>System Accuracy:</b>	typ. +200 µm, max. ± (0.04 + 0.04 x L) mm, (L in [m], up to L = 50 m, at T = 20°C)	
<b>Repeat accuracy</b>	±1 increment	
<b>Resolution and speed <sup>3)</sup></b>	100 µm (quadruple), max. 25 m/s 25 µm (quadruple), max. 4 m/s 10 µm (quadruple), max. 6.5 m/s	
<b>Permissible alignment tolerance</b> (see draft „Mounting tolerances“)		
<b>Gap sensor / magnetic band</b>	0.1 ... 1.0 mm (recommended 0.4 mm)	
<b>Offset</b>	max. ±1 mm	
<b>Tilting</b>	max. 3°	
<b>Torsion</b>	max. 3°	
<b>General data</b>		
<b>Working temperature</b>	-20°C ... +80°C	
<b>Shock resistance</b>	500 g/1 ms	
<b>Vibration strength</b>	30 g/10 ... 2000 Hz	
<b>Protection</b>	Model 1	IP67 acc. to DIN 60529
	Model 2	IP68 / IP69K acc. to DIN 60529 and humidity tested acc. to EN 60068-3-38, EN 60068-3-78
<b>Housing</b>	Aluminium	
<b>Cable</b>	2 m long, PUR 8 x 0.14 mm <sup>2</sup> , shielded, may be used in trailing cable installations	
<b>Status LED</b>	Green	pulse-index
	Red	Error; Speed too high or magnetic fields too weak (8.LI20.XXXX.X020 and 8.LI20.XXXX.X050)
<b>CE compliant acc. to</b>	EN 61000-6-2, EN 61000-6-4 and EN 61000-4-8	
<b>RoHS compliant acc. to</b>	EC guideline 2002/95/EC	


Technical data – Magnetic band Limes B1	
<b>Pole gap</b>	2 mm from pole to pole
<b>Dimensions</b>	width: 10 mm, Thickness: 1.97 mm incl. masking tape
<b>Temperature coefficient</b>	16 x 10 <sup>-6</sup> /K
<b>Working temperature</b>	-20°C ... +80°C -20°C ... +65°C (when mounted solely with adhesive tape)
<b>Storage temperature</b>	-20°C ... +80°C
<b>Mounting</b>	adhesive joint
<b>Measuring</b>	0.1 m (to receive an optimal result of measurement, the magnetic band should be ca. 0.1 m longer than the desired measuring length)
<b>Bending radius</b>	≥ 150 mm (when mounted solely with adhesive tape)

## Function principle

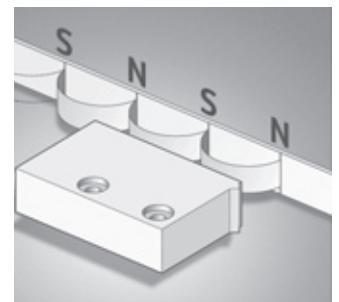

## Signal figures

- 8) Pulse edge interval:  
Pay attention to the instructions in the technical data
- 9) Periodic index signal (every 2 mm); the logical assignment A, B and 0-Signal can change

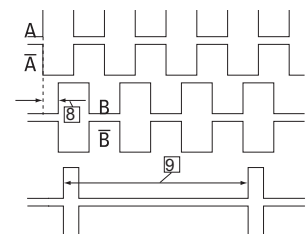

1) If supply voltage correctly applied  
2) Only one channel allowed to be shorted-out  
If  $U_B = 5$  V, short-circuit to channel, 0 V, or + $U_B$  is permitted  
If  $U_B = 5 \dots 30$  V, short-circuit to channel or 0 V is permitted

3) At the listed rotational speed the min. pulse edge interval is 1 µs, this corresponds to 250 kHz. For the max. rotational speed range a counter with a count input frequency of not less than 250 kHz should be provided.

# Linear Measuring Technology


<b>Magnetic measurement system</b>	<b>Limes LI20 / B1</b>	<b>Resolution min. 10 µm</b>
------------------------------------	------------------------	------------------------------

## Terminal assignment

Output circuit	Type of connection	Cable									
1, 2	1	Signal:	0 V	+V	A	$\bar{A}$	B	$\bar{B}$	0	$\bar{0}$	$\perp$
		Cable colour:	WH	BN	GN	YE	GY	PK	BU	RD	shield <sup>1)</sup>


## Dimensions

### Magnetic sensor Limes LI20

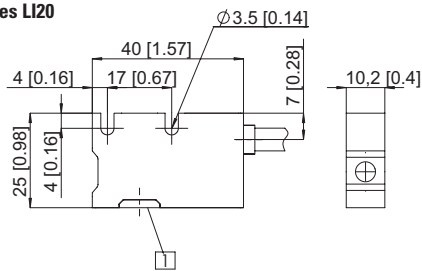

1 active measuring area


### Magnetic band Limes B1

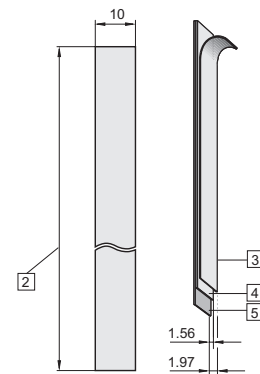

- 2 length L, max. 50 m
- 3 masking tape
- 4 magnetic band
- 5 carrier band


## Permissible mounting tolerances

### Tilting

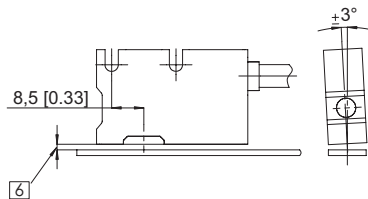

6 distance sensor / magnetic band:  
0.1 ... 1.0 mm (0.4 mm recommended)

### Torsion



### Offset



1) Shield is attached to connector housing