

PTC-Resistor-Relay Type MS(R) 220 KA

Single PTC-Circuit, ATEX-Approval according to Directive 94/9/EC

MS 220 KA



PTC-relay for the application as a protection device against inadmissible heating up at electrical equipment in areas with explosive gases (zones 1 and 2) and areas with combustible dust (21 and 22), e.g. for direct temperature-monitoring of explosion-proof motors EEx e and EEx d.

Vertically arranged terminals. Each terminal remains accessible even if all others are already occupied.

- short-circuit monitoring of sensor-circuit
- output-relay with 1 or 2 change-over contacts (co)
- 2 LEDs for ON and ALARM
- K-cousing, vertically arranged terminals housing 22.5 mm wide
- assembly on DIN-rail or with 2 screws M4 (option)
- UL Recognized Component
- Option:
 - other supply-voltages

Order-numbers:	1 change-over	2 change-over
AC 220-240 V	T 222145	T 222155
AC/DC 24 V		T 222151

- ATEX-approval according to directive 94/9/EC
- 1 PTC-resistor (thermistor) set, each 1...6 PTC-sensors




MSR 220 KA



Same execution as MS 220 KA, additionally with electronic reclosing lock. An alarm is stored until a reset is made.

- ATEX-approval according to directive 94/9/EC
- electronic reclosing lock (disconnectable)
- integrated RESET-button
- link for external reset
- automatic reset at voltage recovery
- LEDs for power-on (green) and alarm (red) in reset-button
- UL Recognized Component
- Option:
 - other supply-voltages

Order-numbers:	1 change-over	2 change-over
AC 220-240 V	T 222165	T 222175
AC/DC 24 V		T 222171
AC 110-120 V		T 222173
AC 380-415 V (ohne cURus)		T 222176

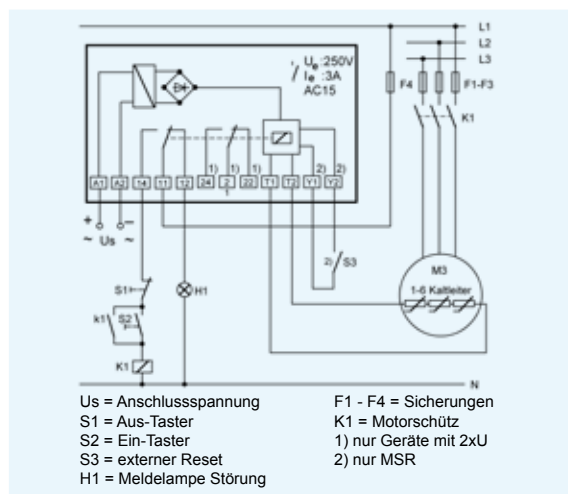

Technical Data

Rated supply-voltage U_s

connectable PTC-resistors
 switching point
 output relay
 type of contact
 test conditions
 rated ambient temperature
 dimensions (h x w x d)
 attachment
 protection housing/terminals
 weight

AC 220 - 240 V $\pm 10\%$ 50/60 Hz ≤ 2 VA
 AC/DC 24 V, AC $\pm 10\%$ DC 21- 30 V < 2 VA, without potential separation
 1...6 in series according to DIN 44081 or 44082 $< 4000 \Omega$
 1 or 2 change-over contacts (co)
 type 2 (see "general technical informations")
 see "general technical informations"
 -20...+55 °C
 design K: 75 x 22,5 x 110 [mm]
 on 35 mm DIN-rail or with 2 screws M4 (option)
 IP 30 / IP 20
 app. 150 g