

Pt100-Temperature Relays type TR400

Digital, 4 Sensors, 4 Limits

TR400



C **R** **U** **S**

The Pt100 thermostat TR400 is a temperature controller and monitors up to four Pt100 (RTD) sensors at the same time. Four switching points and four relays permit almost any combination of switching action. It also can select the highest temperature of a group of three or four sensors. The temperatures of two sensors or groups of sensors can be issued

to 2 analog outputs i.e. for remote displays or further evaluation. Programming is very variable and simple.

Due to the fact that 4 type Pt100 sensors can be connected, the unit is especially suitable for temperature monitoring wherever up to 4 different measuring points must be monitored simultaneously:

- machines, bearings, plants
- motors and generators with simultaneous monitoring of bearing oilcoolant
- transformers with additional monitoring of the core temperature also

1


Function

Function overview

- Measuring and monitoring range -199 ... +800 °C
- 4 sensor inputs with 2- or 3-wire connection
- 4 relay outputs K1 to K4 with change-over contact
- Sensor Error Relay K7 monitors sensor break or sensor short circuit as well as an interruption of the powersupply.
- 2 analog outputs, 0/4...20 mA and 0/2...10 V, with individual scaling.
- Universal power supply. 2 ranges AC/DC 24-240 V
- USB-Stick-Terminal for up- and download of sets of parameters and for firmware-updates

Displays

- built-in 3 digit temperature display and 1 digit programm-mode display
- LED Alarm showing state of the alarm relays
- LED Sensor Error blinking at sensor short circuit or sensor interruption.
- Stored Values of MIN- and MAX- temperature can be displayed
- „Sensor select“ showing temperatures of the different sensors „Alarm select“ showing switching points .

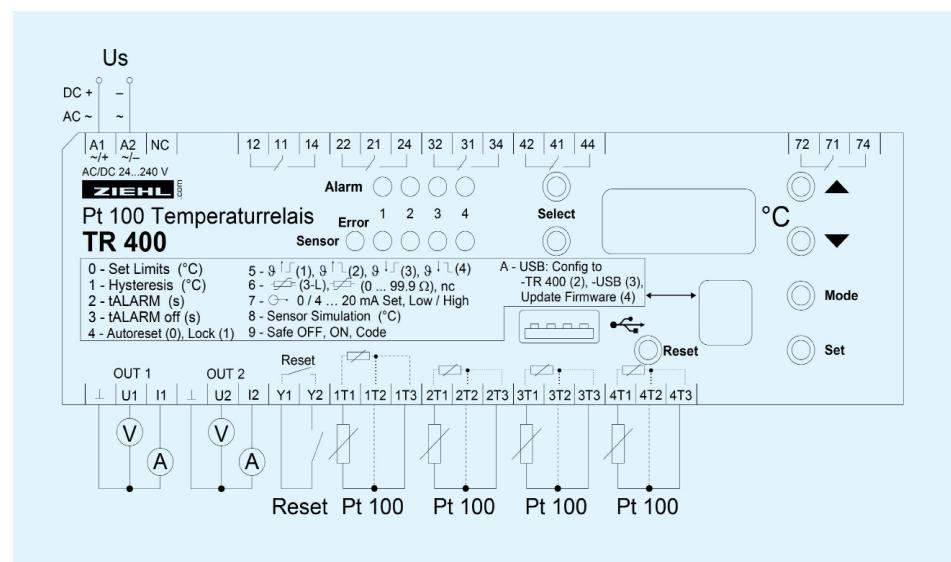

Technical Data TR400

Rated supply voltage Us	tolerance DC-supply tolerance AC-supply	AC/DC 24 – 240 V DC 20,4...297 V AC 20...264 V
	power consumption frequency	< 4 W, < 13 VA 0 / 50 / 60 Hz
Relay outputs		5 change-over contacts (co) max. AC 415 V max. 5 A max. 1250 VA (ohmic load) max. 120 W at DC 30 V
	Nominal operational current I _e AC15 DC13	I _e = 3 A U _e = 250 V I _e = 0,1 A U _e = 250 V I _e = 2 A U _e = 24 V
	recommended fuse for contacts expected life mechanical expected life electrical	T 3,15 A (gL) 3 x 10 ⁷ operations 1 x 10 ⁶ operations with AC 250 V / 5 A, cos φ = 1
Testing conditions	ambient temperature range	EN 60 010-1 - 20 ... + 65 °C
	galvanic separation	Us-Relay, Sensors, USB, Analog output Reset input -> DC 3820 V
	No galvanic separation	Relay - Sensors, USB, Analog output Reset input -> DC 3820 V Sensors, USB, Analog output, Reset input
Sensor connection	measuring accuracy sensor current measuring delay time t _M	4 x Pt 100 acc. to EN 60751 / IEC 60751, 2-/3-wire ±0,5 % of value ±1 Digit ≤ 0,7 mA <1,5 s
Temperature alarm	switch points hysteresis delay time tALARM delay time tALARM off	-199 ... +800 °C 1 ... 99 K 0,1 ... 99,9 s 0 ... 999 s
Analog output OUT 1/2	voltage outputs current outputs output resistance current no-load voltage accuracy	DC 0/2 V – 10 V , max. DC 10 mA DC 0/4 mA – 20 mA max. 500 Ω max. DC 16 V 1% of span ±1 K
Housing	design dimensions (h x w x d) line connection solid wire protection housing / terminals attachment weight	V8 90 x 140 x 58 [mm] 1 x 1,5 mm ² (1,0 mm ² with end sleeves for strands) IP 30 / IP 20 on 35 mm DIN rail according to DIN EN 60 715 or M4 screw app. 360 g
Order-number		T224380

Order-numbers